




IBOCO®

IBO

25 Years in business

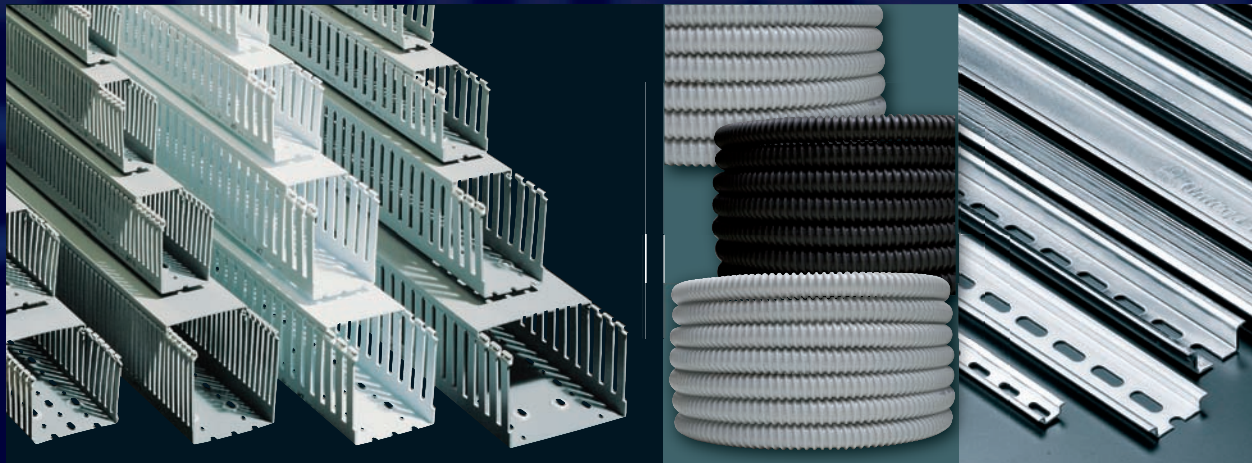

Integrated Panel Management



T1

DUCT SERIES

Material

Rigid PVC,
self-extinguishing

Color

Light GREY RAL 7030
WHITE

Standard Length


6 Feet 6 3/4 Inches

Standard Unit

Duct complete
with cover

THE MOST COMPREHENSIVE RANGE

NOMINAL 1 1/2"-2 1/4"-3"-4"



NOMINAL 5/8"-1"



All wiring ducts come complete with cover. Wiring duct covers can be sold separately: see page 8 and IBOCO Corp. Price List.

Catalog Number	Nominal Size (WxH)	Dimensions in inches (Actual)				Dimensions WxH (in millimeters)	Standard Carton (Qty)	
		W	H	E	F		Lengths (1)	Feet
T1-0506G	1/2 x 5/8	.60	.71	.20	.30	15 x 18	20	120
T1-0510G	1/2 x 1	.60	1.18	.20	.30	15 x 30	20	120
T1-0522G	1/2 x 2 1/4	.60	2.36	.20	.30	15 x 60	16	96
T1-1010*	1 x 1	1.00	1.18	.20	.30	25 x 30	18	108
T1-1015*	1 x 1 1/2	1.00	1.57	.31	.47	25 x 40	18	108
T1-1022*	1 x 2 1/4	1.00	2.36	.31	.47	25 x 60	24	144
T1-1030*	1 x 3	1.00	3.15	.31	.47	25 x 80	24	144
T1-1040*	1 x 4	1.00	3.94	.31	.47	25 x 100	8	48
T1-1515*	1 1/2 x 1 1/2	1.57	1.57	.31	.47	40 x 40	20	120
T1-1522*	1 1/2 x 2 1/4	1.57	2.36	.31	.47	40 x 60	18	108
T1-1530*	1 1/2 x 3	1.57	3.15	.31	.47	40 x 80	16	96
T1-1540*	1 1/2 x 4	1.57	3.94	.31	.47	40 x 100	8	48
T1-2215G	2 1/4 x 1 1/2	2.36	1.57	.31	.47	60 x 40	12	72
T1-2222*	2 1/4 x 2 1/4	2.36	2.36	.31	.47	60 x 60	12	72
T1-2230*	2 1/4 x 3	2.36	3.15	.31	.47	60 x 80	12	72
T1-2240*	2 1/4 x 4	2.36	3.94	.31	.47	60 x 100	4	24
T1-3015G	3 x 1 1/2	3.15	1.57	.31	.47	80 x 40	12	72
T1-3022*	3 x 2 1/4	3.15	2.36	.31	.47	80 x 60	12	72
T1-3030*	3 x 3	3.15	3.15	.31	.47	80 x 80	12	72
T1-3040*	3 x 4	3.15	3.94	.31	.47	80 x 100	4	24
T1-3050*	3 x 5	2.95	4.92	.31	.47	75 x 125	6	36
T1-4015G	4 x 1 1/2	3.94	1.57	.31	.47	100 x 40	8	48
T1-4022G	4 x 2 1/4	3.94	2.36	.31	.47	100 x 60	8	48
T1-4030*	4 x 3	3.94	3.15	.31	.47	100 x 80	8	48
T1-4040*	4 x 4	3.94	3.94	.31	.47	100 x 100	4	24
T1-4050*	4 x 5	3.94	4.92	.31	.47	100 x 125	4	24
T1-6040*	6 x 4	5.91	3.94	.31	.47	150 x 100	4	24


Example: T1-0510 G = 1/2"x 1" light GREY duct with cover

(1) Each standard length is actually 6'6 3/4" but is counted as 6 feet for packaging and pricing

* Color - add suffix "G" for light GREY "W" for WHITE

ADHESIVE BACKING - add suffix "A" to catalog number - contact sales office for pricing (see page 23)

Available in 1 meter length contact sales office



Non-slip cover design of minimum encumbrance and maximum grip.



Restricted slot opening for wire retaining.



Two predetermined breaklines:
- for breaking off and removal of sidewall finger segments only.
- for removal of sidewall finger and base segments.



Burr-free edges.

Recess boss for rapid mounting of components.

For wire fill capacity and base perforation of the wiring duct, see page 18.

T1-E



DUCT SERIES

Material

Rigid PVC,
self-extinguishing

Color


Light GREY RAL 7030
WHITE

Standard Length


6 Feet 6 3/4 Inches

Standard Unit

Duct complete
with cover

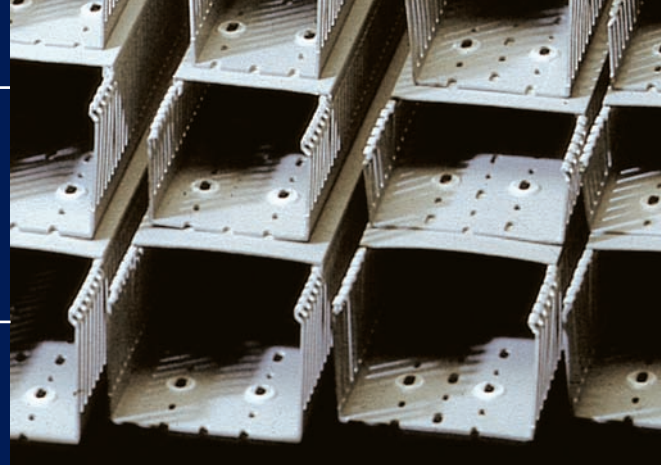

Catalog Number	Nominal Size (WxH)	Dimensions in inches (Actual)				Dimensions WxH (in millimeters)	Standard Carton Lengths (1)	Standard Carton (Qty) Feet
		W	H	E	F			
T1E-1015*	1 x 1½	1.00	1.57	.16	.24	25 x 40	18	108
T1E-1022*	1 x 2¼	1.00	2.36	.16	.24	25 x 60	24	144
T1E-1030*	1 x 3	1.00	3.15	.16	.24	25 x 80	24	144
T1E-1040*	1 x 4	1.00	3.94	.16	.24	25 x 100	8	48
T1E-1515*	1½ x 1½	1.57	1.57	.16	.24	40 x 40	20	120
T1E-1522*	1½ x 2¼	1.57	2.36	.16	.24	40 x 60	18	108
T1E-1530*	1½ x 3	1.57	3.15	.16	.24	40 x 80	16	96
T1E-1540*	1½ x 4	1.57	3.94	.16	.24	40 x 100	8	48
T1E-2215G	2¼ x 1½	2.36	1.57	.16	.24	60 x 40	12	72
T1E-2222*	2¼ x 2¼	2.36	2.36	.16	.24	60 x 60	12	72
T1E-2230*	2¼ x 3	2.36	3.15	.16	.24	60 x 80	12	72
T1E-2240*	2¼ x 4	2.36	3.94	.16	.24	60 x 100	4	24
T1E-3015G	3 x 1½	3.15	1.57	.16	.24	80 x 40	12	72
T1E-3022*	3 x 2¼	3.15	2.36	.16	.24	80 x 60	12	72
T1E-3030*	3 x 3	3.15	3.15	.16	.24	80 x 80	12	72
T1E-3040*	3 x 4	3.15	3.94	.16	.24	80 x 100	4	24
T1E-4015G	4 x 1½	3.94	1.57	.16	.24	100 x 40	8	48
T1E-4022G	4 x 2¼	3.94	2.36	.16	.24	100 x 60	8	48
T1E-4030*	4 x 3	3.94	3.15	.16	.24	100 x 80	8	48
T1E-4040*	4 x 4	3.94	3.94	.16	.24	100 x 100	4	24



Example: T1E-1015 G = 1"x1½" light GREY duct with cover


Available in 1 meter length
contact sales office

(1) Each standard length is actually 6'6 3/4"
but is counted as 6 feet for packaging and pricing

* Color - add suffix "G" for light GREY "W" for WHITE

ADHESIVE BACKING - add suffix "A" to catalog number -
contact sales office for pricing (see page 22)

All wiring ducts come complete with cover. Wiring duct covers can be sold separately: see page 8 and IBOCO Corp. Price List.



Restricted slot opening for wire retaining.


Two predetermined breaklines:
- for breaking off and removal of sidewall finger segments only.
- for removal of sidewall finger and base segments.

Burr-free edges.

Recess boss for rapid mounting of components.

Non-slip cover design of minimum encumbrance and maximum grip.

For wire fill capacity and base perforation of the wiring duct, see page 18.

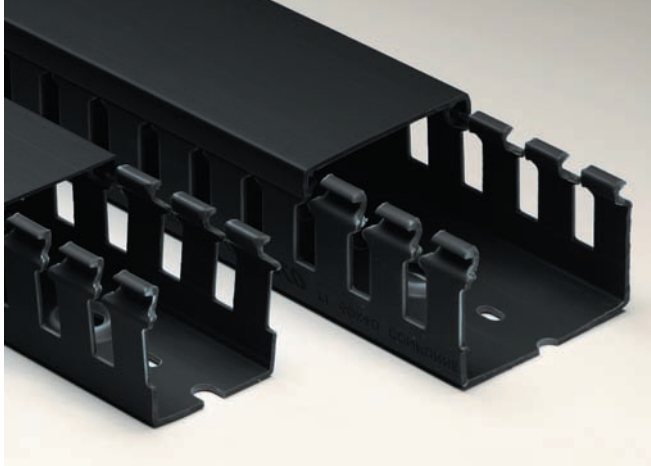

T1-K

DUCT SERIES

Material

Rigid PVC,
self-extinguishing


Color
BLACK

Standard Length

6 Feet 6 3/4 Inches


Standard Unit

Duct complete
with cover



Catalog Number	Nominal Size (WxH)	Dimensions in inches (Actual)				Dimensions WxH (in millimeters)	Standard Carton (Qty)	
		W	H	E	F		Lengths (1)	Feet
T1-1040K	1 x 4	1.00	3.94	.31	.47	25x100	8	48
T1-1530K	1½ x 3	1.57	3.15	.31	.47	40x 80	16	96
T1-2222K	2¼ x 2¼	2.36	2.36	.31	.47	60x 60	12	72
T1-2240K	2¼ x 4	2.36	3.94	.31	.47	60x100	4	24
T1-3030K	3 x 3	3.15	3.15	.31	.47	80x 80	12	72
T1-3040K	3 x 4	3.15	3.94	.31	.47	80x100	4	24
T1-3050K	3 x 5	2.95	4.92	.31	.47	75x125	6	36
T1-4040K	4 x 4	3.94	3.94	.31	.47	100x100	4	24
T1-4050K	4 x 5	3.94	4.92	.31	.47	100x125	4	24

For special sizes contact sales office

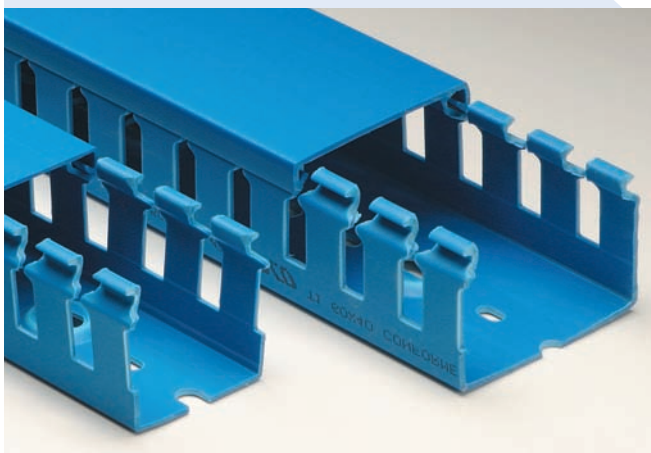

T1-B

Material

Rigid PVC,
self-extinguishing


Color
BLUE RAL 5015

Standard Length

6 Feet 6 3/4 Inches

Standard Unit

Duct complete
with cover



Catalog Number	Nominal Size (WxH)	Dimensions in inches (Actual)				Dimensions WxH (in millimeters)	Standard Carton (Qty)	
		W	H	E	F		Lengths (1)	Feet
T1-1010B	1 x 1	1.00	1.18	.20	.30	25 x 30	18	108
T1-1022B	1 x 2¼	1.00	2.36	.31	.47	25 x 60	24	144
T1-1030B	1 x 3	1.00	3.15	.31	.47	25 x 80	24	144
T1-1515B	1½ x 1½	1.57	1.57	.31	.47	40x 40	20	120
T1-1522B	1½ x 2¼	1.57	2.36	.31	.47	40x 60	18	108
T1-1530B	1½ x 3	1.57	3.15	.31	.47	40x 80	16	96
T1-2215B	2¼ x 1½	2.36	1.57	.31	.47	60x 40	12	72
T1-2222B	2¼ x 2¼	2.36	2.36	.31	.47	60x 60	12	72
T1-2230B	2¼ x 3	2.36	3.15	.31	.47	60x 80	12	72
T1-3030B	3 x 3	3.15	3.15	.31	.47	80x 80	12	72
T1-3050B	3 x 5	2.95	4.92	.31	.47	75x 125	6	36
T1-4030B	4 x 3	3.94	3.15	.31	.47	100x 80	8	48
T1-4040B	4 x 4	3.94	3.94	.31	.47	100x100	4	24


Blue color duct recognized for intrinsic safe circuits

NOTE : 1) Each standard length is 6' 6¾" but is considered as 6 feet for the purpose of pricing and packaging.



T1H

HALOGEN FREE WIRING DUCT: STANDARD FINGER



Measurements

Catalog Number	Size (w x h)	Size (Millimeters)	Standard Carton (Feet)
T1H-1020LG*	1 x 2	25 x 50	72
T1H-1030LG*	1 x 3	25 x 75	72
T1H-1515LG	1½ x 1½	37.5 x 37.5	72
T1H-1520LG*	1½ x 2	37.5 x 50	72
T1H-1530LG	1½ x 3	37.5 x 75	72
T1H-2020LG*	2 x 2	50 x 50	72
T1H-2030LG*	2 x 3	50 x 75	72
T1H-2040LG*	2 x 4	50 x 100	48
T1H-3020LG	3 x 2	75 x 50	72
T1H-3030LG*	3 x 3	75 x 75	48
T1H-3040LG*	3 x 4	75 x 100	24
T1H-4020LG	4 x 2	100 x 50	48
T1H-4030LG	4 x 3	100 x 75	48
T1H-4040LG	4 x 4	100 x 100	24

LG = LIGHT GREY RAL 7035

*CURRENTLY AVAILABLE

**Except T1H-4030LG Service temperature
-13° F + 158° F -25° C to 70° C

Material

Noryl NH 5110E

Color

Light GREY RAL 7035

Standard Length

6 Feet 6 3/4 Inches

Standard Unit

Duct complete with cover

Service temperature**

-13° F to 194° F
-25° C to 90° C

Flammability

UL 94 V-1


Oxygen Index

34.0% (ISO 4589-2)



T1EH

HALOGEN FREE WIRING DUCT: NARROW FINGER



Measurements

Catalog Number	Size (w x h)	Size (Millimeters)	Standard Carton (Feet)
T1EH-1515LG	1½ x 1½	37.5 x 37.5	72
T1EH-1520LG	1½ x 2	37.5 x 50	72
T1EH-1530LG	1½ x 3	37.5 x 75	72
T1EH-2020LG	2 x 2	37.5 x 50	72
T1EH-2030LG	2 x 3	50 x 75	72
T1EH-3020LG	3 x 2	75 x 50	72
T1EH-3030LG	3 x 3	75 x 75	48
T1EH-4020LG	4 x 2	100 x 50	48
T1EH-4030LG	4 x 3	100 x 75	48

LG = LIGHT GREY RAL 7035

**Except T1EH-4030LG Service temperature
-13° F + 158° F -25° C to 70° C

Material

Noryl NH 5110E

Color

Light GREY RAL 7035

Standard Length

6 Feet 6 3/4 Inches

Standard Unit

Duct complete with cover

Service temperature**

-13° F to 194° F
-25° C to 90° C

Flammability

UL 94 V-1

Oxygen Index

34.0% (ISO 4589-2)

For wire fill capacity and base perforation of the wiring duct, see page 18.